

HSKY

DESIGNED FOR BETTER LIGHTING

PRODUCT CATALOGUE 2026-2027

Multi-functional lighting | OEM & ODM

Find the right lighting for your range

Product families, switchable functions and a clear route to selection.

Wall Lights	04
Square, round, wide, sensor and rechargeable models	
LED Modules & Lamps	13
Selectable wattage, CCT, colour rendering and optics	
Downlights & Spotlights	20
Ultra-thin profiles and compact LED modules	
Track Lights	23
GU10, zoomable GU10 and GX53 track fittings	
Light Fittings & Accessories	24
GU10, GX53 and G9 housings and accessories	
Solar Lighting	39
Solar wall lights and spotlights	
12V Mini & Cabinet Lighting	41
Individual lights and multi-light sets	
OEM & ODM	53
Product selection, finishes, packaging and samples	

Multi-functional lighting, explained

Select the function that fits your range, then confirm the model-specific specifications.

Dual wattage

Two selectable power settings in one product. Configure before installation.

3CCT selectable

Choose one of three fixed colour temperatures using the selector.

3CCT + Dim to Warm

Three fixed-CCT settings plus a separate DTW mode. Marketed as 4CCT on selected models.

TRIAC dimming

Adjust brightness with a compatible phase-cut dimmer. Confirm dimmer compatibility.

CRI & optics

Compare colour rendering and beam angle for the intended application.

WOD001 | Square wall light

A compact aluminium up-and-down wall light with adjustable beams and a choice of controls.



Reference model	HS-WOD001-TD
Power	2 x 3W
Input voltage	220-240V AC
Luminous flux	450lm
CRI	>85
Fixed CCT options	2700K / 3000K / 4000K
Dimming	TRIAC
Beam angle	Adjustable 10-120 degrees
IP rating	IP65
Dimensions	100 x 100 x 100mm
Housing	Aluminium


Series options: single-CCT dimmable, DTW, 3CCT, 3CCT + DTW, Wi-Fi, Bluetooth and Zigbee.

Finishes: Black / White / Gray / Taupe / Rusted.

Specifications above refer to the single-CCT model; confirm data for other versions.

WOD001 | Dual wattage + 4CCT

HS-WOD001-2W4C / Two power levels. Three fixed colour temperatures plus Dim to Warm.

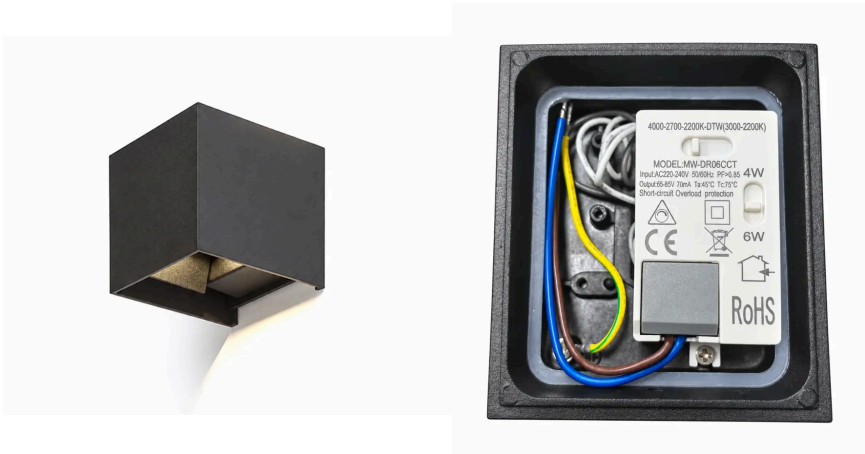

4W / 6W

Selectable power

2200K / 2700K / 4000K

Fixed colour temperatures

DTW 2200-3000K

Warmer light as you dim

Model	HS-WOD001-2W4C
Input voltage	220-240V AC, 50/60Hz
Selectable power	4W / 6W
Luminous flux	400lm (+10% / -15%)
Dimming	TRIAC, 5-100%
Beam angle	Adjustable 10-120 degrees
IP rating	IP65
Dimensions	100 x 100 x 100mm
Housing / LEDs	Aluminium / Bridgelux SMD
Rated lifetime	25,000 hours
Warranty	3 years

Finish options Black / White / Taupe / Rusted

Four lighting modes: 2200K, 2700K, 4000K or DTW.
Set selectors before installation. Confirm dimmer compatibility.

WOD002 | Round wall light

A rounded aluminium profile with adjustable up-and-down light and multiple control options.



2 x 3W | 450lm | IP65

Black / White / Gray / Taupe / Rusted
135 x 115 x 100mm

Reference model	HS-WOD002-TD
Power	2 x 3W
Input voltage	220-240V AC
Luminous flux	450lm
CRI	85
Fixed CCT options	2700K / 3000K / 4000K
Dimming	Yes
Beam angle	Adjustable 10-120 degrees
IP rating	IP65
Dimensions	135 x 115 x 100mm
Housing	Aluminium

Series options: single-CCT dimmable, DTW, 3CCT, 3CCT + DTW, Wi-Fi, Bluetooth and Zigbee.
Specifications above refer to the single-CCT model; confirm data for other versions.

WOD001 | Version selection

Compare the exact control, colour and output configuration before specifying your range.



2 x 3W | 220-240V | IP65

100 x 100 x 100mm | Aluminium

Adjustable beam: 10-120 degrees.

Finishes: Black / White / Gray / Taupe / Rusted.

Click a model to open its website specification.

Model	Colour / mode	Control	Output	CRI
HS-WOD001-TD	2700K / 3000K / 4000K	TRIAC	450lm	>85
HS-WOD001-DTW	2000K-3000K DTW	TRIAC	350lm	>90
HS-WOD001-3CCT	2700K-3000K-4000K selectable	TRIAC	450lm	>85
HS-WOD001-3CDTW	2700K-3000K-4000K-DTW selectable	TRIAC	350lm	>90
HS-WOD001-BLUETOOTH	RGBW / 2700-6500K	Bluetooth	450lm	>90
HS-WOD001-WI-FI	RGBW / 2700-6500K	Wi-Fi / Tuya Smart	450lm	>90
HS-WOD001-ZIGBEE	RGBW / 2700-6500K	Zigbee	450lm	>90

Dual-wattage WOD001 remains on its dedicated page.

WOD002 | Version selection

Compare the exact control, colour and output configuration before specifying your range.



2 x 3W | 220-240V | IP65

135 x 115 x 100mm | Aluminium

Adjustable beam: 10-120 degrees.

Finishes: Black / White / Gray / Taupe / Rusted.

Click a model to open its website specification.

Model	Colour / mode	Control	Output	CRI
HS-WOD002-TD	2700K / 3000K / 4000K	Dimmable	450 lm	85
HS-WOD002-DTW	2700-3000K DTW	Dimmable	350 lm	90
HS-WOD002-3CCT	2700 / 3000 / 4000K selectable	Dimmable	450 lm	85
HS-WOD002-3CDTW	2700 / 3000 / 4000K + DTW selectable	Dimmable	350 lm	90
HS-WOD002-WI-FI	RGBW + CW	Wi-Fi	450 lm	85
HS-WOD002-BLUETOOTH	RGBW + CW	Bluetooth	450 lm	85
HS-WOD002-ZIGBEE	RGBW + CW	Zigbee	450 lm	85

Confirm dimmer, app and gateway compatibility for the selected version.

WOD003 | Wide wall light

A 200mm aluminium up-and-down wall light with four dimmable configurations.



2 x 5W | IP54

220-240V AC
200 x 100 x 100mm
Adjustable beam: 10-120 degrees
Finishes: Black / White / Gray

Model	Colour / mode	Output	CRI
HS-WOD003-TD	2700K / 3000K / 4000K	650 lm	85
HS-WOD003-DTW	2700-3000K DTW	550 lm	90
HS-WOD003-3CCT	2700 / 3000 / 4000K selectable	650 lm	95
HS-WOD003-3CDTW	2700 / 3000 / 4000K + DTW selectable	550 lm	90

All four versions are dimmable. Select the required finish and dimmer compatibility.

WOD001 | Sensor wall lights

Automatic wall lighting with dusk-to-dawn, motion or combined sensing.



PIR version shown

2 x 3W | 450lm | CRI85
220-240V AC | IP54
100 x 100 x 100mm | Aluminium
Adjustable beam: 10-120 degrees

Black / White / Gray / Taupe / Rusted
Request the sensor threshold, range and time delay for your application.

Model	Sensor function
HS-WOD001-DD	Dusk-to-dawn sensor
HS-WOD001-PIR	PIR motion sensor
HS-WOD001-DDM	Dusk-to-dawn + PIR

Confirm sensor settings and external-dimmer compatibility when ordering.

Rechargeable PIR wall lights

Indoor battery-powered wall lighting. IP20 models are intended for indoor use.

HS-5W-RWL60



Power: 5W | PIR sensor | IP20
Dimensions: 100 x 100 x 60 mm
Battery: 1 x 2000mAh 18650
Recharge time: 6-8 hours
Working time: 12 hours / 24 hours in sensor mode

HS-7W-RWL80




Power: 7W | PIR sensor | IP20
Dimensions: 100 x 100 x 80 mm
Battery: 2 x 2000mAh 18650
Recharge time: 6-8 hours
Working time: 24 hours / 48 hours in sensor mode

Working and charging times depend on use and charging conditions.

Rechargeable PIR wall lights


Indoor battery-powered wall lighting. IP20 models are intended for indoor use.

HS-6W-RWL100

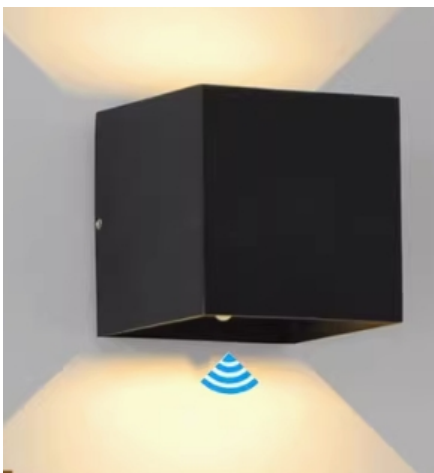

Power: 2 x 3W | PIR sensor | IP20
Dimensions: 100 x 100 x 100 mm
Battery: 1 x 2000mAh 18650
Recharge time: 6-8 hours
Working time: 12 hours / 24 hours in sensor mode

HS-7W-RWL90

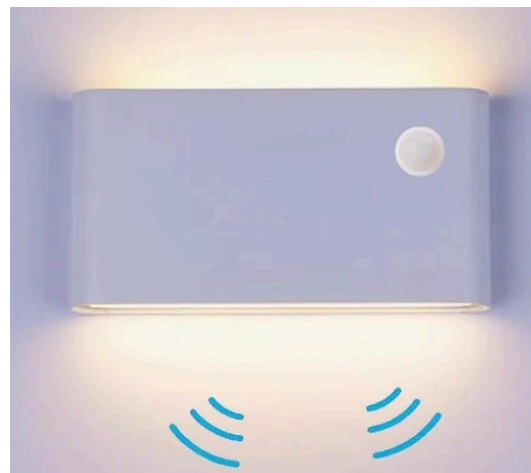

Power: 7W | PIR sensor | IP20
Dimensions: 175 x 90 x 30 mm
Battery: 2 x 2000mAh 18650
Recharge time: 6-8 hours
Working time: 24 hours / 48 hours in sensor mode

Working and charging times depend on use and charging conditions.

LED Modules | Dual Wattage + Selectable CCT

Compare wattage, CCT, colour rendering and optics to select your light source.



1



2



3



No.	Item no.	Watt.	Dimension.	CRI	CCT	Beam Angle	Material	Color
1	HS-4W/6W-LS001	4W/6W	D50xH32mm	98	3CCT 2700-3000-4000K	15/36/60 °	Aluminum+Lens	Black / Silver / Gold
					4CCT 2700K-3000K-4000K-DTW			
2	HS-6W/8W-LS002	6W/8W	D50xH53mm	98	3CCT 2700-3000-4000K	15/36/60 °	Aluminum+Lens	Black / Silver / Gold
					4CCT 2700K-3000K-4000K-DTW			
3	HS-9W/12W-LS003	9W/12W	D50xH65mm	98	3CCT 2700-3000-4000K	15/36/60 °	Aluminum+Lens	Black / Silver / Gold
					4CCT 2700K-3000K-4000K-DTW			

LED Modules | 3CCT & Dim to Warm

Compare wattage, CCT, colour rendering and optics to select your light source.



No.	Item no.	Watt.	Dimension.	CRI	CCT	Beam Angle	Material	Color
1	HS-6W-LS001	6W	D50xH32mm	98	2000K-3000K DTW	15/36/60 °	Aluminum+Lens	Black / Silver / Gold
					3CCT 2700-3000-4000K			
2	HS-8W-LS002	8W	D50xH53mm	98	2000K-3000K DTW	15/36/60 °	Aluminum+Lens	Black / Silver / Gold
					3CCT 2700-3000-4000K			
3	HS-13W-LS003	13W	D50xH65mm	98	2000K-3000K DTW	15/36/60 °	Aluminum+Lens	Black / Silver / Gold
					3CCT 2700-3000-4000K			

LED Modules | Reflector Optics

Compare wattage, CCT, colour rendering and optics to select your light source.



1



2



<u>NO.</u>	<u>Item no.</u>	<u>Watt.</u>	<u>Dimension.</u>	<u>Lamp Holder</u>	<u>CRI</u>	<u>CCT</u>	<u>Beam Angle</u>	Material	<u>Color</u>
1	HS-MR16-RE1501CCT	15W	D50xH75mm	DC cable	95	3CCT 2700-3000-4000K	38/60 °	Aluminum+Reflector	Black / White
2	HS-MR16-RE1001CCT	10W	D50xH60mm	DC cable	95	3CCT 2700-3000-4000K	38/60 °	Aluminum+Reflector	Black / White

LED Modules | GU10 Replacement System

Compare wattage, CCT, colour rendering and optics to select your light source.

MR16 module + GU10 replacement = MR16 GU10 base



- * PC cover+ Aluminum heatsink
- ~Reflector 24 °
- ~Lens 15/24/36 °
- ~PC diffuser 60 °
- * DOB driver integrated



Item no.	Watt.	Lumen	CRI	PF	Dimension	Triac Dim
HS-5W-PCMO001	5W	350LM	>90	>0.9	D50xH72mm	2000K /3000K /4000K /6000K
HS-7W-PCMO001	7W	450LM	>90	>0.9	D50xH72mm	2000K /3000K /4000K /6000K
HS-9W-PCMO001	9W	550LM	>90	>0.9	D50xH72mm	2000K /3000K /4000K /6000K

LED Lamps | 50mm GU10 & High-CRI Narrow Beam

Compare wattage, CCT, colour rendering and optics to select your light source.



1



2



3



NO	Item no.	Watt.	Lumen	CRI	PF	Base	Beam angle	CCT	Size
1	HS-RL0501	5W	300lm	85	>0.9	GU10	12/24 °	WW/NW/CW/DTW	D50*H60mm
2	HS-RE0501	5W	300lm	85	>0.9	External driver	12/24 °	WW/NW/CW/DTW	D50*H45mm
3	HS-RL0603	6W	300lm	98	>0.9	GU10	10 °	3CCT 2700K-3200K-4000K	D50*H60mm

LED Lamps | GU10 & External-driver Versions

Compare wattage, CCT, colour rendering and optics to select your light source.



1



2



3



NO	Item no.	Watt.	Lumen	CRI	PF	Base	Beam angle	CCT	Size
1	HS-RL0601	6W	300	85	>0.9	GU10	12/24/36 °	WW/NW/CW/DTW	D70*H65mm
2	HS-RE0601	6W	300	85	>0.9	B15d External driver	12/24/36 °	WW/NW/CW/DTW	D70*H50mm
3	HS-RL0602	6W	280	85	>0.9	GU10	12/24 °	3CCT 2700K-3200K-4000K	D70*H69mm

LED Lamps | AR111 3CCT

Compare wattage, CCT, colour rendering and optics to select your light source.



1



2



3



4



NO.	Item no.	Wattage	Dimension	Lamp Holder	CRI	CCT	Beam Angle	Material	Color
1	HS-AR111-RE1501CCT	15W	D111xH103mm	G53	90	3CCT 2700-3200-4000K	8/12/24/36/45 °	Aluminum	Black / Silver
2	HS-AR111-RE1201CCT	12W	D111xH65mm	GU10	90	3CCT 2700-3200-4000K	8/12/24/36/45 °	Aluminum	Black / Silver
3	HS-AR111-RE1202CCT	12W	D111xH65mm	G53	90	3CCT 2700-3200-4000K	24/45 °	Plastic	White / Black
4	HS-AR111-RE0702CCT	7W	D111xH65mm	GU10	90	3CCT 2700-3200-4000K	24/45 °	Plastic	White / Black

Ultra-thin Downlights | Reflector Optics

Compact installation, selectable colour temperature and dimming options by model.



Item no.	Watt.	Voltage	Lumen	CRI	PF	Beam Angle	CCT	Cover	Dimension
HS-TDL1202-3C	9W/12W switchable	230V	1050lm	90	>0.85	60 °	3CCT 2700-3000-4000K	Reflector	D110*H30mm Hole 95mm
HS-TDL0602-3C	4W/6W switchable	230V	450lm	90	>0.85	60 °	3CCT 2700-3000-4000K	Reflector	D82*H30mm Hole 68mm
HS-TDL0501-3C	5W	230V	300lm	90	>0.85	60 °	3CCT 2700-3000-4000K	Reflector	D63*H30mm Hole 55mm



Item no.	Watt.	Voltage	Lumen	CRI	PF	Angle	CCT	Cover	Dimension
HS-TDL1202-4C	9W/12W switchable	230V	1050lm	90	>0.85	60 °	4CCT 2700-3000-4000K-DTW	Reflector	D110*H30mm Hole 95mm
HS-TDL0602-4C	4W/6W switchable	230V	450lm	90	>0.85	60 °	4CCT 2700-3000-4000K-DTW	Reflector	D82*H30mm Hole 68mm
HS-TDL0501-4C	5W	230V	300lm	90	>0.85	60 °	4CCT 2700-3000-4000K-DTW	Reflector	D63*H30mm Hole 55mm

Ultra-thin Downlights | Lens Optics

Compact installation, selectable colour temperature and dimming options by model.



Item no.	Watt.	Voltage	Lumen	CRI	PF	Beam Angle	CCT	Cover	Dimension
HS-STDL0702-3C	5W/7W switchable	230V	550lm	90	>0.85	60 °	3CCT 2700-3000-4000K	Lens	D82*H30mm Hole 68mm
HS-STDL0501-3C	5W	230V	400lm	90	>0.85	60 °	3CCT 2700-3000-4000K	Lens	D63*H30mm Hole 55mm



Item no.	Watt.	Voltage	Lumen	CRI	PF	Beam Angle	CCT	Cover	Dimension
HS-STDL0702-4C	5W/7W switchable	230V	550lm	90	>0.85	60 °	4CCT 2700-3000-4000K-DTW	Lens	D82*H30mm Hole 68mm
HS-STDL0501-4C	5W	230V	400lm	90	>0.85	60 °	4CCT 2700-3000-4000K-DTW	Lens	D63*H30mm Hole 55mm

Compact LED Modules | Wiring Box Included

Compact installation, selectable colour temperature and dimming options by model.



Item no.	Watt.	Dimension.	Lamp Holder	CRI	CCT	Beam Angle	Material	Color
HS-RL0503	5W	D50xH30mm	INCL. WIRING BOX	90	2700/3000/4000K	40 °	Aluminum+PC lens	Black / White
HS-RL0503-DTW	5W	D50xH30mm	INCL. WIRING BOX	90	Dim To Warm	60 °	Aluminum+PC lens	Black / White
HS-RL0503-3CCT	5W	D50xH30mm	INCL. WIRING BOX	90	3CCT 2700K-3000K-4000K	60 °	Aluminum+PC lens	Black / White

Track fittings | GU10 & GX53

Replaceable-lamp housings for accent and display lighting. Lamps are supplied separately.



HS-GU10-MRSTL

HS-GU10-MRZSTL

HS-TLGX53T3

Model	Lamp	Dimensions	Design
HS-GU10-MRSTL	GU10	D60 x H180 mm	Track fitting
HS-GU10-MRZSTL	GU10	D55 x H150 mm	Zoomable
HS-TLGX53T3	GX53	D90 x H120 mm	Track fitting

Black / White. Confirm track and adapter compatibility. Light output, CCT and dimming depend on the lamp selected.

GU10 Fittings | Recessed IP65

GU10, GX53 and G9 housings and accessories. Select the lamp separately where applicable.



<u>NO.</u>	<u>Item no.</u>	<u>Dimension</u>	<u>Cut-out</u>	<u>Lamp Holder</u>	<u>IP Rate</u>	<u>Material</u>	<u>Color</u>
1	HS-RCL65-GU10-R1	D85xH35mm	68-75mm	GU10	IP65	Aluminum	White/Black/Silver
2	HS-RCL65-GU10-S1	L85xW85xH35mm	68-75mm	GU10	IP65	Aluminum	White/Black/Silver

GU10 Fittings | Surface-mounted IP65

GU10, GX53 and G9 housings and accessories. Select the lamp separately where applicable.



1



2



<u>NO.</u>	<u>Item no.</u>	<u>Dimension</u>	<u>Lamp Holder</u>	<u>IP Rate</u>	<u>Material</u>	<u>Color</u>
1	HS-SFCL65-GU10-R1	D55xH90mm	GU10	IP65	Aluminum	White/Black/Silver
2	HS-SFCL65-GU10-S1	L90xW90xH90mm	GU10	IP65	Aluminum	White/Black/Silver

GU10 Wall Fittings | IP65

GU10, GX53 and G9 housings and accessories. Select the lamp separately where applicable.



1



2



3



4



<u>NO.</u>	<u>Item no.</u>	<u>Dimension</u>	<u>Lamp Holder</u>	<u>IP Rate</u>	<u>Material</u>	<u>Color</u>
1	HS-WL65-GU10-R1	D68xW80xH80mm	1xGU10	IP65	Aluminum	White/Black/Grey/Rusted
2	HS-WL65-GU10-S1	L80xW68xH80mm	1xGU10	IP65	Aluminum	White/Black/Grey/Rusted
3	HS-WL65-2GU10-R1	D68xW80xH150mm	2XGU10	IP65	Aluminum	White/Black/Grey/Rusted
4	HS-WL65-2GU10-S1	L68xW80xH150mm	2XGU10	IP65	Aluminum	White/Black/Grey/Rusted

GU10 Fittings | Track, Surface & Recessed

GU10, GX53 and G9 housings and accessories. Select the lamp separately where applicable.



<u>NO.</u>	<u>Item no.</u>	<u>Dimension</u>	<u>Lamp Holder</u>	<u>IP Rate</u>	<u>Material</u>	<u>Color</u>
1	HS-GU10-STL001	D60xH180mm	1xGU10	IP20	Aluminum	White/Black
2	HS-GU10-SCL001	L60xH190mm	1xGU10	IP20	Aluminum	White/Black
3	HS-GU10-CCL001	D95xH110mm cutout75mm	1XGU10	IP20	Aluminum	White/Black

GU10 Fittings | Surface-mounted IP20

GU10, GX53 and G9 housings and accessories. Select the lamp separately where applicable.



<u>NO.</u>	<u>Item no.</u>	<u>Dimension</u>	<u>Lamp Holder</u>	<u>IP Rate</u>	<u>Material</u>	<u>Color</u>
1	HS-GU10-SCL002	D55xH110mm	1xGU10	IP20	Aluminum	White/Black
2	HS-GU10-SCL003	L80xH110mm	1xGU10	IP20	Aluminum	White/Black
3	HS-GU10-SCL004	L82xW82xH100mm	1XGU10	IP20	Aluminum	White/Black
4	HS-GU10-SCL005	D70xH90xD55mm	1XGU10	IP20	Aluminum	White/Black

GX53 Fittings | Surface-mounted IP65

GU10, GX53 and G9 housings and accessories. Select the lamp separately where applicable.



<u>NO.</u>	<u>Item no.</u>	<u>Dimension</u>	<u>Lamp Holder</u>	<u>IP Rate</u>	<u>Material</u>	<u>Color</u>
1	HS-SFCL65-GX53-R1	D105xH60mm	GX53	IP65	Aluminum	White/Black/Grey
2	HS-SFCL65-GX53-R2	D105xH70mm	GX53	IP65	Aluminum	White/Black/Grey

GX53 Fittings | IP20

GU10, GX53 and G9 housings and accessories. Select the lamp separately where applicable.



1




2



<u>NO.</u>	<u>Item no.</u>	<u>Dimension</u>	<u>Lamp Holder</u>	<u>IP Rate</u>	<u>Material</u>	<u>Color</u>
1	HS-GX53-SCL003	D90xH110mm	GX53	IP20	Aluminum	White/Black
2	HS-GX53-SCL004	D90xH110mm Cut-out75mm	GX53	IP20	Aluminum	White/Black

G9 Wall Fittings | IP65

GU10, GX53 and G9 housings and accessories. Select the lamp separately where applicable.

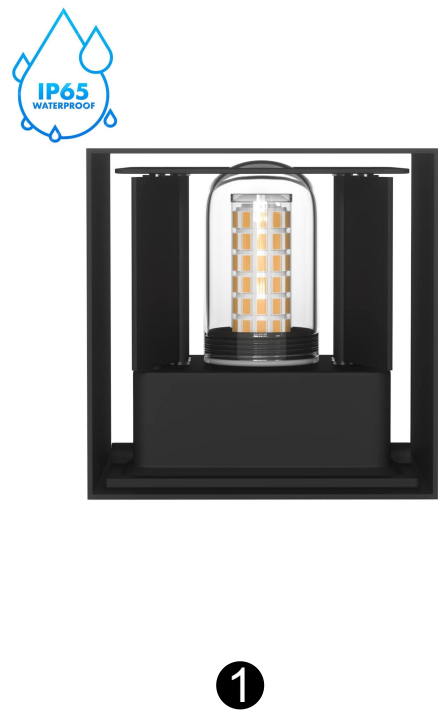

<u>NO.</u>	<u>Item no.</u>	<u>Dimension</u>	<u>Lamp Holder</u>	<u>IP Rate</u>	<u>Beam Angle</u>	Material	<u>Color</u>
1	HS-WL65-G9-P	L100xW100xH100mm	1xG9	IP65	0-120 °	Plastic	White/Black
1	HS-WL65-G9-A	L100xW100xH100mm	1xG9	IP65	0-120 °	Aluminum	White/Black/Grey/Rusted
2	HS-WL65-2G9-A	L200xW100xH100mm	2XG9	IP65	0-120 °	Aluminum	White/Black/Grey/Rusted

G9 Wall Fittings | IP20

GU10, GX53 and G9 housings and accessories. Select the lamp separately where applicable.



<u>NO.</u>	<u>Item no.</u>	<u>Dimension</u>	<u>Lamp Holder</u>	<u>IP Rate</u>	<u>Beam Angle</u>	Material	<u>Color</u>
1	HS-G9-WL001	L160xW60xH95mm	1xG9	IP20	120 °	Aluminum	White/Black/Grey/Rusted
2	HS-G9-WL002	L160xW60xH200mm	1xG9	IP20	120 °	Aluminum	White/Black/Grey/Rusted
3	HS-G9-WL003	L100xW100xH100mm	1XG9	IP20	120 °	Aluminum	White/Black/Grey/Rusted

GU10 Garden Spike Fittings | Series A

GU10, GX53 and G9 housings and accessories. Select the lamp separately where applicable.



1



2



GU10 (Excluded)



<u>NO.</u>	<u>Item no.</u>	<u>Watt.</u>	<u>Voltage</u>	Beam Angle	<u>IP Rate</u>	Material	<u>Dimension</u>
1	HS-SPL65-GU10A1	7W max	230V	60 °	IP65	Aluminum	D70*100mm Pole 160mm
2	HS-SPL65-GU10A2	7W max	230V	60 °	IP65	Aluminum	D70*120mm Pole 160mm

GU10 Garden Spike Fittings | Series B

GU10, GX53 and G9 housings and accessories. Select the lamp separately where applicable.



1



2



GU10 (Excluded)



GU10



NO.	Item no.	Watt.	Voltage	Beam Angle	IP Rate	Material	Dimension
1	HS-SPL65-GU10B1	7W max	230V	60 °	IP65	Aluminum	D95*100mm Pole 160mm
2	HS-SPL65-GU10B2	7W max	230V	60 °	IP65	Aluminum	D95*120mm Pole 160mm

GU10 Lamp Holders & Wiring Accessories

GU10, GX53 and G9 housings and accessories. Select the lamp separately where applicable.



1



2



3

<u>NO.</u>	<u>Item no.</u>	<u>Voltage</u>	<u>IP Rate</u>	Material	<u>Dimension</u>	<u>Remarks</u>
1	HS-GU10-HD001	230V	IP20	Ceramic	D28*L100mm	/
2	HS-GU10-HD002	230V	IP20	Ceramic	D28*L100mm	/
3	HS-GU10-HD003	230V	IP20	Ceramic	D28*L100mm	INCL. WIRING BOX

GU10 | Recessed ceiling fittings

Three compact fittings with model-specific cut-outs and protection ratings.

HS-GU10-MRS5001



Size: D85 x H30 mm
Cut-out: D75 mm
IP: IP20
Lamp: GU10
Finish: Black / White

HS-GU10-MRS500F



Size: D85 x H35 mm
Cut-out: D68 mm
IP: IP20
Lamp: GU10
Finish: Black / White

HS-GU10-MRS5010P



Size: D85 x H30 mm
Cut-out: D75 mm
IP: IP65
Lamp: GU10
Finish: Black / White

Fittings supplied without lamps. Choose a compatible GU10 light source.

GU10 | Cylinder & zoomable fittings

Surface and recessed profiles with black and white finish options.

HS-GU10-MRSCL



Mount: Surface ceiling
Size: D60 x H190 mm
Lamp: GU10

HS-GU10-MRRCL



Mount: Recessed ceiling
Size: D60 x H180 mm
Cut-out: D75 mm
Lamp: GU10

HS-GU10-MRZSCL



Mount: Surface ceiling
Size: D55 x H160 mm
Lamp: GU10
Zoomable fitting

HS-GU10-MRZRCL



Mount: Recessed ceiling
Size: D100 x H110 mm
Cut-out: D75 mm
Lamp: GU10
Zoomable fitting

Black / White. Lamps not included. Confirm installation requirements for each model.

GX53 & G9 | Wall & recessed fittings

Replaceable-lamp designs for wall accents and ceiling applications.

HS-WLGX53W




Lamp: GX53
Mount: Wall
Size: D90 x H110 mm

HS-CLGX53R



Lamp: GX53
Mount: Recessed ceiling
Size: D90 x H110 mm
Cut-out: D75 mm

HS-WLG901R



Lamp: G9
Mount: Wall
Size: L160 x W60 x H95 mm
IP: IP20

HS-WLG902R



Lamp: G9
Mount: Wall
Size: L160 x W60 x H200 mm
IP: IP20

Black / White. Fittings supplied without lamps; light performance depends on the lamp selected.

Solar Wall Lights | Single CCT & 2CCT

Solar-powered designs for outdoor wall and decorative lighting.



Single CCT

<u>Item No</u>	<u>Watt.</u>	<u>CCT</u>	<u>IP</u>	<u>Special</u>	<u>Material</u>
HS-SLR-WL0601	2x3W	2700K/3000K	IP65	Solar	ABS-Aluminum
<u>Size</u>	<u>Battery</u>	<u>Working time</u>	<u>Charging time</u>	<u>Warranty</u>	<u>Cert.</u>
L128*W97xH80mm	Li-ion 1800mAh	8hours	6-8h	3years	CE & ROHS



2CCT

<u>Item No</u>	<u>Watt.</u>	<u>CCT</u>	<u>IP</u>	<u>Special</u>	<u>Material</u>
HS-SLR-WL0602	2x3W	2CCT 2700K-4000K	IP65	Solar	ABS-Aluminum
<u>Size</u>	<u>Battery</u>	<u>Working time</u>	<u>Charging time</u>	<u>Warranty</u>	<u>Cert.</u>
L128xW97xH80 mm	Li-ion 1800mAh	8hours	6-8h	3years	CE & ROHS

Solar Lighting | 3CCT & RGBW

Solar-powered designs for outdoor wall and decorative lighting.



3CCT

<u>Item No</u>	<u>Watt.</u>	<u>CCT</u>	<u>IP</u>	<u>Special</u>	<u>Material</u>
HS-SLR-SL03	2x3W	3CCT 3000K-4000K-6000K	IP65	Solar	ABS-Aluminum
<u>Size</u>	<u>Battery</u>	<u>Working time</u>	<u>Charging time</u>	<u>Warranty</u>	<u>Cert.</u>
L128*W97xH80mm	Li-ion 1800mAh	8hours	6-8h	3years	CE & ROHS



RGBW

<u>Item No</u>	<u>Watt.</u>	<u>CCT</u>	<u>IP</u>	<u>Special</u>	<u>Material</u>
HS-SLR-SL04	4x1W leds	RGBW	IP65	Solar	Aluminum + PE
<u>Size</u>	<u>Battery</u>	<u>Working time</u>	<u>Charging time</u>	<u>Warranty</u>	<u>Cert.</u>
410x270x90 mm	Li-ion 1800mAh	8hours	6-8h	3years	CE & ROHS

12V MINI & CABINET LIGHTING | Fixed CCT

Compare individual luminaires and 4-, 6- or 12-light sets. Match the supply and control system.



<u>Item no.</u>	<u>Watt.</u>	<u>Voltage</u>	<u>Lumen</u>	<u>CRI</u>	<u>PF</u>	Beam Angle	<u>CCT</u>	<u>Cover</u>	<u>Dimension</u>
HS-MIN03-12V	3W	12VDC	220lm	85	>0.9	35 °	2700K/3000K	Lens	D35*H28mm Hole 28mm
HS-MIN03-12V-4S	4x3W	12VDC	880lm	85	>0.9	35 °	2700K/3000K	Lens	D35*H28mm Hole 28mm
HS-MIN03-12V-6S	6x3W	12VDC	1320lm	85	>0.9	35 °	2700K/3000K	Lens	D35*H28mm Hole 28mm
HS-MIN03-12V-12S	12x3W	12VDC	2640lm	85	>0.9	35 °	2700K/3000K	Lens	D35*H28mm Hole 28mm

12V MINI & CABINET LIGHTING | 3CCT

Compare individual luminaires and 4-, 6- or 12-light sets. Match the supply and control system.



Item no.	Watt.	Voltage	Lumen	CRI	PF	Beam Angle	CCT	Cover	Dimension
HS-MIN03-12V3C	3W	12VDC	220lm	85	>0.9	35 °	3CCT 2700-3000-4000K	Lens	D35*H28mm Hole 28mm
HS-MIN03-12V-4S3C	4x3W	12VDC	880lm	85	>0.9	35 °	3CCT 2700-3000-4000K	Lens	D35*H28mm Hole 28mm
HS-MIN03-12V-6S3C	6x3W	12VDC	1320lm	85	>0.9	35 °	3CCT 2700-3000-4000K	Lens	D35*H28mm Hole 28mm
HS-MIN03-12V-12S3C	12x3W	12VDC	2640lm	85	>0.9	35 °	3CCT 2700-3000-4000K	Lens	D35*H28mm Hole 28mm

12V MINI & CABINET LIGHTING | Fixed CCT

Compare individual luminaires and 4-, 6- or 12-light sets. Match the supply and control system.



Item no.	Watt.	Voltage	Lumen	CRI	PF	Beam Angle	CCT	Cover	Dimension
HS-MIN04-12V	3W	12VDC	220lm	85	>0.9	35 °	2700K/3000K	Reflector	D35*H28mm Hole 28mm
HS-MIN04-12V-4S	4x3W	12VDC	880lm	85	>0.9	35 °	2700K/3000K	Reflector	D35*H28mm Hole 28mm
HS-MIN04-12V-6S	6x3W	12VDC	1320lm	85	>0.9	35 °	2700K/3000K	Reflector	D35*H28mm Hole 28mm
HS-MIN04-12V-12S	12x3W	12VDC	2640lm	85	>0.9	35 °	2700K/3000K	Reflector	D35*H28mm Hole 28mm

12V MINI & CABINET LIGHTING | 3CCT

Compare individual luminaires and 4-, 6- or 12-light sets. Match the supply and control system.



Item no.	Watt.	Voltage	Lumen	CRI	PF	Beam Angle	CCT	Cover	Dimension
HS-MIN04-12V3C	3W	12VDC	220lm	85	>0.9	35 °	3CCT 2700-3000-4000K	Reflector	D35*H28mm Hole 28mm
HS-MIN04-12V-4S3C	4x3W	12VDC	880lm	85	>0.9	35 °	3CCT 2700-3000-4000K	Reflector	D35*H28mm Hole 28mm
HS-MIN04-12V-6S3C	6x3W	12VDC	1320lm	85	>0.9	35 °	3CCT 2700-3000-4000K	Reflector	D35*H28mm Hole 28mm
HS-MIN04-12V-12S3C	12x3W	12VDC	2640lm	85	>0.9	35 °	3CCT 2700-3000-4000K	Reflector	D35*H28mm Hole 28mm

12V MINI & CABINET LIGHTING | Fixed CCT

Compare individual luminaires and 4-, 6- or 12-light sets. Match the supply and control system.



Item no.	Watt.	Voltage	Lumen	CRI	PF	Beam Angle	CCT	Cover	Dimension
HS-MIN05-12V	3W	12VDC	220lm	85	>0.9	35 °	2700K/3000K	Lens	D35*H28mm Hole 28mm
HS-MIN05-12V-4S	4x3W	12VDC	880lm	85	>0.9	35 °	2700K/3000K	Lens	D35*H28mm Hole 28mm
HS-MIN05-12V-6S	6x3W	12VDC	1320lm	85	>0.9	35 °	2700K/3000K	Lens	D35*H28mm Hole 28mm
HS-MIN0512V-12S	12x3W	12VDC	2640lm	85	>0.9	35 °	2700K/3000K	Lens	D35*H28mm Hole 28mm

12V MINI & CABINET LIGHTING | 3CCT

Compare individual luminaires and 4-, 6- or 12-light sets. Match the supply and control system.



<u>Item no.</u>	<u>Watt.</u>	<u>Voltage</u>	<u>Lumen</u>	<u>CRI</u>	<u>PF</u>	Beam Angle	<u>CCT</u>	<u>Cover</u>	<u>Dimension</u>
HS-MIN05-12V3C	3W	12VDC	220lm	85	>0.9	35 °	3CCT 2700-3000-4000K	Lens	D35*H28mm Hole 28mm
HS-MIN05-12V-4S3C	4x3W	12VDC	880lm	85	>0.9	35 °	3CCT 2700-3000-4000K	Lens	D35*H28mm Hole 28mm
HS-MIN05-12V-6S3C	6x3W	12VDC	1320lm	85	>0.9	35 °	3CCT 2700-3000-4000K	Lens	D35*H28mm Hole 28mm
HS-MIN05-12V-12S3C	12x3W	12VDC	2640lm	85	>0.9	35 °	3CCT 2700-3000-4000K	Lens	D35*H28mm Hole 28mm

12V MINI & CABINET LIGHTING | Fixed CCT

Compare individual luminaires and 4-, 6- or 12-light sets. Match the supply and control system.



Item no.	Watt.	Voltage	Lumen	CRI	PF	Beam Angle	CCT	Cover	Dimension
HS-MIN06-12V	3W	12VDC	220lm	85	>0.9	35 °	2700K/3000K	Lens	D45*H32mm Hole 40mm
HS-MIN06-12V-4S	4x3W	12VDC	880lm	85	>0.9	35 °	2700K/3000K	Lens	D45*H32mm Hole 40mm
HS-MINA06-12V-6S	6x3W	12VDC	1320lm	85	>0.9	35 °	2700K/3000K	Lens	D45*H32mm Hole 40mm
HS-MIN06-12V-12S	12x3W	12VDC	2640lm	85	>0.9	35 °	2700K/3000K	Lens	D45*H32mm Hole 40mm

12V MINI & CABINET LIGHTING | 3CCT

Compare individual luminaires and 4-, 6- or 12-light sets. Match the supply and control system.



<u>Item no.</u>	<u>Watt.</u>	<u>Voltage</u>	<u>Lumen</u>	<u>CRI</u>	<u>PF</u>	Beam Angle	<u>CCT</u>	<u>Cover</u>	<u>Dimension</u>
HS-MIN06-12V3C	3W	12VDC	220lm	85	>0.9	35 °	3CCT 2700-3000-4000K	Lens	D45*H32mm Hole 40mm
HS-MIN06-12V-4S3C	4x3W	12VDC	880lm	85	>0.9	35 °	3CCT 2700-3000-4000K	Lens	D45*H32mm Hole 40mm
HS-MIN06-12V-6S3C	6x3W	12VDC	1320lm	85	>0.9	35 °	3CCT 2700-3000-4000K	Lens	D45*H32mm Hole 40mm
HS-MIN06-12V-12S3C	12x3W	12VDC	2640lm	85	>0.9	35 °	3CCT 2700-3000-4000K	Lens	D45*H32mm Hole 40mm

12V MINI & CABINET LIGHTING | Fixed CCT

Compare individual luminaires and 4-, 6- or 12-light sets. Match the supply and control system.



<u>Item no.</u>	<u>Watt.</u>	<u>Voltage</u>	<u>Lumen</u>	<u>CRI</u>	<u>PF</u>	Beam Angle	<u>CCT</u>	<u>Cover</u>	<u>Dimension</u>
HS-CAB03-12V	3W	12VDC	220lm	85	>0.9	35/100 °	2700K/3000K	Lens	D65*H14mm Hole 50mm
HS-CAB03-12V-4S	4x3W	12VDC	880lm	85	>0.9	35/100 °	2700K/3000K	Lens	D65*H14mm Hole 50mm
HS-CAB03-12V-6S	6x3W	12VDC	1320lm	85	>0.9	35/100 °	2700K/3000K	Lens	D65*H14mm Hole 50mm
HS-CAB03-12V-12S	12x3W	12VDC	2640lm	85	>0.9	35/100 °	2700K/3000K	Lens	D65*H14mm Hole 50mm
HS-CAB03-12V-SMART	3W	12VDC	220lm	85	>0.9	35/100 °	RGBW+CW	Lens	D65*H14mm Hole 50mm

12V MINI & CABINET LIGHTING | 3CCT

Compare individual luminaires and 4-, 6- or 12-light sets. Match the supply and control system.



<u>Item no.</u>	<u>Watt.</u>	<u>Voltage</u>	<u>Lumen</u>	<u>CRI</u>	<u>PF</u>	Beam Angle	<u>CCT</u>	<u>Cover</u>	<u>Dimension</u>
HS-CAB03-12V3C	3W	12VDC	220lm	85	>0.9	35/100 °	3CCT 2700-3000-4000K	Lens	D65*H14mm Hole 50mm
HS-CAB03-12V-4S3C	4x3W	12VDC	880lm	85	>0.9	35/100 °	3CCT 2700-3000-4000K	Lens	D65*H14mm Hole 50mm
HS-CAB03-12V-6S3C	6x3W	12VDC	1320lm	85	>0.9	35/100 °	3CCT 2700-3000-4000K	Lens	D65*H14mm Hole 50mm
HS-CAB03-12V-12S3C	12x3W	12VDC	2640lm	85	>0.9	35/100 °	3CCT 2700-3000-4000K	Lens	D65*H14mm Hole 50mm

12V MINI & CABINET LIGHTING | Fixed CCT

Compare individual luminaires and 4-, 6- or 12-light sets. Match the supply and control system.



<u>Item no.</u>	<u>Watt.</u>	<u>Voltage</u>	<u>Lumen</u>	<u>CRI</u>	<u>PF</u>	Beam Angle	<u>CCT</u>	<u>Cover</u>	<u>Dimension</u>
HS-CAB04-12V	3W	12VDC	220lm	85	>0.9	35/100 °	2700/3000K	Milky	D65*H14mm Hole 50mm
HS-CAB04-12V-4S	4x3W	12VDC	880lm	85	>0.9	35/100 °	2700/3000K	Milky	D65*H14mm Hole 50mm
HS-CAB04-12V-6S	6x3W	12VDC	1320lm	85	>0.9	35/100 °	2700/3000K	Milky	D65*H14mm Hole 50mm
HS-CAB04-12V-12S	12x3W	12VDC	2640lm	85	>0.9	35/100 °	2700/3000K	Milky	D65*H14mm Hole 50mm
HS-CAB04-12V-SMART	3W	12VDC	220lm	85	>0.9	35/100 °	RGBW+CW	Milky	D65*H14mm Hole 50mm

12V MINI & CABINET LIGHTING | 3CCT

Compare individual luminaires and 4-, 6- or 12-light sets. Match the supply and control system.



<u>Item no.</u>	<u>Watt.</u>	<u>Voltage</u>	<u>Lumen</u>	<u>CRI</u>	<u>PF</u>	Beam Angle	<u>CCT</u>	<u>Cover</u>	<u>Dimension</u>
HS-CAB04-12V3C	3W	12VDC	220lm	85	>0.9	35/100 °	3CCT 2700-3000-4000K	Milky	D65*H14mm Hole 50mm
HS-CAB04-12V-4S3C	4x3W	12VDC	880lm	85	>0.9	35/100 °	3CCT 2700-3000-4000K	Milky	D65*H14mm Hole 50mm
HS-CAB04-12V-6S3C	6x3W	12VDC	1320lm	85	>0.9	35/100 °	3CCT 2700-3000-4000K	Milky	D65*H14mm Hole 50mm
HS-CAB04-12V-12S3C	12x3W	12VDC	2640lm	85	>0.9	35/100 °	3CCT 2700-3000-4000K	Milky	D65*H14mm Hole 50mm

Build your range with HSKY

OEM & ODM enquiries start with the right product, functions and packaging requirements.

01 Product & functions

Choose the model, power settings, CCT, optics and control method.

02 Finish & branding

Specify housing colour, branding and artwork requirements.

03 Packaging

Discuss colour boxes, labels and market-specific packaging requirements.

04 Samples & documents

Request samples and the technical documents needed for your selected configuration.

SEND YOUR ENQUIRY

Model | Functions | Finish | Quantity | Destination market

HSKY

DESIGNED FOR BETTER LIGHTING

HSKY TECHNOLOGY LIMITED
8TH BUILDING 10TH CHENG DONG RD, XIAOLAN,ZHONGSHAN,GUANGDONG, CHINA
M: 18258126601

E: Info@hskytech.cn
<https://www.hskytech.cn>